


ROAD SIGNS

The earlier you remove graffiti after it occurs; the easier it is to remove. Graffiti on painted road signs is removed easily using the **SoSafe YELLOW LABEL Graffiti Remover** for painted surfaces.



1. Read safety precautions!
 2. Surface must be clean and DRY (yellow label does not work on wet surfaces).
 3. Test an in conspicuous part of surface to test for product reaction.
 4. **Apply product undiluted to graffiti.**
 5. **Allow at least 1 minute for product to penetrate graffiti.**
 6. **Wipe graffiti off with paper towel or white rag.**
 7. Repeat steps 4 to 6 (as required).
 8. Rinse / wipe all treated areas with water to remove graffiti remover (this will deactivate the product).
- (RECOMMENDED) Apply SoSafe Safety Shield to protect against future graffiti.

Glitz Paint Removing Wipes can also be used. Available from hardware store. Follow instructions on the pack.

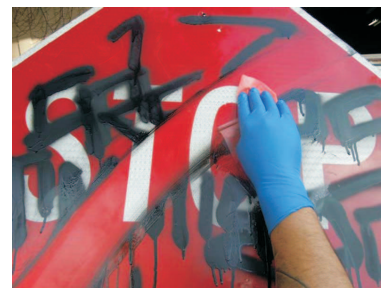

The information on this sheet is a guide ONLY and the compiler shall not be liable in any way for any misuse or damage resulting from this information. Any information should be used at your own discretion.